



RO.60

Centrali di comando
Control units

SHADE
SHADE 4
ES.MINI

∅

58 mm

Nm

120 Nm/max

rpm

17 rpm/max

Finecorsa Meccanico

La regolazione dei finecorsa è facile ed intuitiva.

Robustezza e sicurezza

Il perno riduttore metallico a forma di stella conferisce al motore grande affidabilità ed elevate prestazioni.

Fissaggio senza supporti

Il motore può essere fissato senza supporti aggiuntivi garantendo massima velocità e semplicità di installazione grazie alla testa metallica.

Mechanical stop


Adjusting the stop is easy and intuitive.

Robustness and safety

The star-shaped metal reduction gear pin makes the motor very reliable and high performances.

Mounting without supports

The motor can be mounted without additional supports. Thanks to the metal head, it is very easy and quick to install.

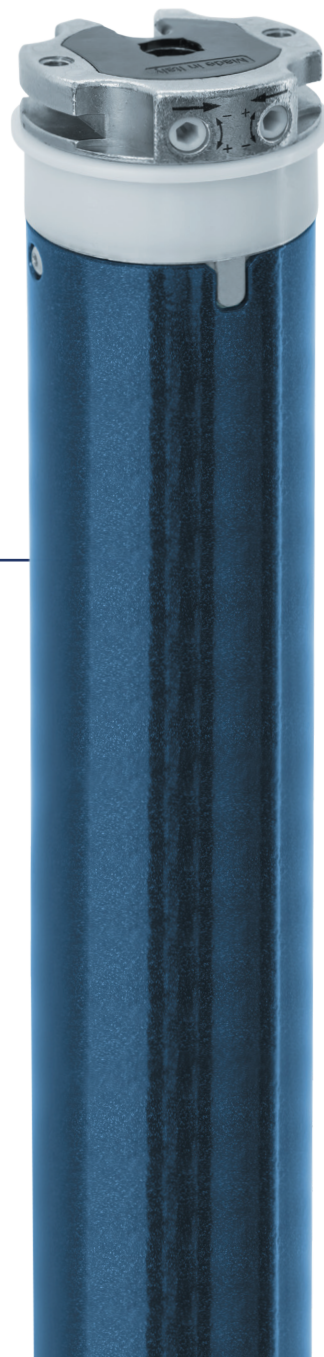

Dimensioni D'ingombro

Overall Dimensions



Marrone >> Rotazione R1 | Brown >> R1 Rotation
 Nero >> Rotazione R2 | Black >> R2 Rotation
 Blu >> Neutro | Blue >> Neutral
 Giallo-Verde >> ⊕ | Yellow-Green >> ⊕



∅
58 mm

Nm/max
120

rpm/max
17

Adattatori

Adapters



RO.60 OT70

Kit adattatori ottagonali.
Octagonal adapters kit.



RO.60 TO70

Kit adattatori tondi.
Round adapters kit.



RO.60 OG78

Kit adattatori ogiva.
Ogive adapters kit.



RO.60 OG85

Kit adattatori ogiva.
Ogive adapters kit.

Supporti

Brackets



RO.0551

Perno quadro 16 mm con staffa omega.
Pin for 16 mm square with omega bracket.



RO.0568

Piastra 100x100 mm.
100x100 mm plate.

	RO.60 85/17	RO.60 100/11	RO.60 120/11
Coppia massima Max. Torque	85 Nm	100 Nm	120 Nm
Velocità Speed	17 r.p.m.	11 r.p.m.	11 r.p.m.
Alimentazione motore Motor voltage supply	230 Vac 50 Hz	230 Vac 50 Hz	230 Vac 50 Hz
Corrente massima assorbita Max absorbed current	1,70 A	1,60 A	1,90 A
Potenza assorbita Absorbed power	375 W	360 W	415 W
Giri Finecorsa No. of turns before stop	25	25	25
Tempo di Funzionamento Operating time	4 min	4 min	4 min
Indice di protezione Protection level	IP44	IP44	IP44
Cavo 4x0,75 mm ² 4x0,75 mm ² cable	lg. 2,50 m	lg. 2,50 m	lg. 2,50 m
Peso Weight	5,70 kg	5,70 kg	5,70 kg